




For bicycles and riders

The MPB pedestrian and bicycle barrier combines a turnstile for pedestrian access with a hinged gate for bicycles. When a rider enters the turnstile the hinged gate also opens automatically when the presence of a bicycle is recognized by the induction loop, allowing the bicycle to enter. It thus provides a secure and rapid access solution for both bike and rider, particularly at bicycle parking garages and for companies whose employees can access the grounds on two wheels.

The MPB is characterized by its robust design, well thought-out details, and maintenance-free energy-efficient MHTM™ drive technology (optional for the turnstile). It can also be customized to meet individual customer applications through the use of differing materials and locking systems, as well as additional components such as illumination and direction displays.




For bicycle and rider

The MPB permits simultaneous access for riders and their bikes. A variety of options are available for access control.



Innovative drive technology

The MHTM™ drive unit (optional) is maintenance-free, energy-efficient, and has an exceptional soft-start action.



Maximum safety

Low impact forces and sensitive contact detection offer optimum protection for riders and their bikes.



Easy access to components

All the components necessary for operation are accommodated in the main beams, considerably simplifying assembly, commissioning and maintenance.

MPB

Turnstile with bicycle gate

- › Simultaneous access for bike and rider
- › Sensitive contact detection for maximum safety
- › Maximum comfort through adaptive rotary speed
- › Bicycle detection via induction loop
- › Low power consumption due to maintenance-free MHTM™ drive (optionally available for the turnstile)
- › Designed for 10 million opening and closing actions



Technical data	MPB 111	MPB 112
Technology: turnstile/hinged gate	electromechanical/motor-driven	motor-driven/motor-driven
Voltage	110 – 240 VAC, 50/60 Hz	110 – 240 VAC, 50/60 Hz
Power consumption	approx. 70 W (without accessories)	approx. 60 W (without accessories)
Duty cycle	100 %	100 %
Enclosure rating	IP 43	IP 43
Dimensions (L x W x H)	2500 x 2458 x 2291 mm	2500 x 2458 x 2291 mm
Weight	approx. 480 kg	approx. 480 kg
Temperature range	–25 to +55°C	–25 to +55°C


Options	
Material	Galvanized steel, powder-coated steel in standard colors, powder-coated steel in special colors, stainless steel 14571
Drive	Turnstile electromechanical or with electric motor
Reaction to power failure	Free access or auto-locking on power failure
Attachments	Extension columns, illumination, access indicator, base frame, base mounting set, roof, connection set for twin system

Potential applications		


Standard colors		
RAL 7042	RAL 7016	RAL 6005

External view


Variant: turnstile on right

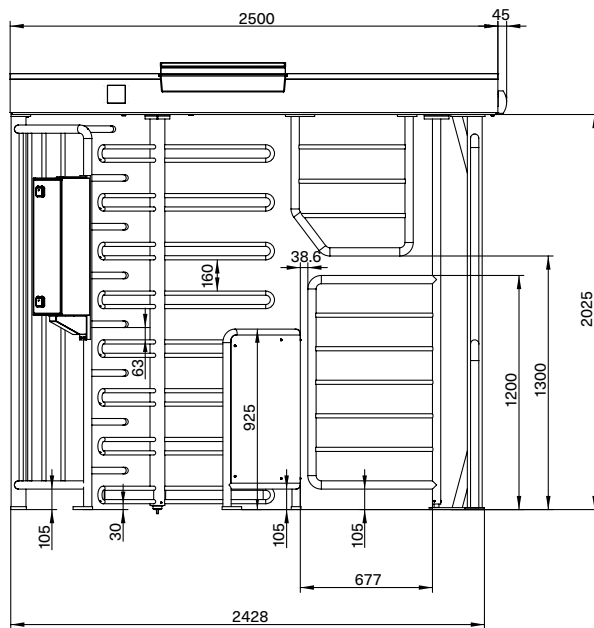

Side view

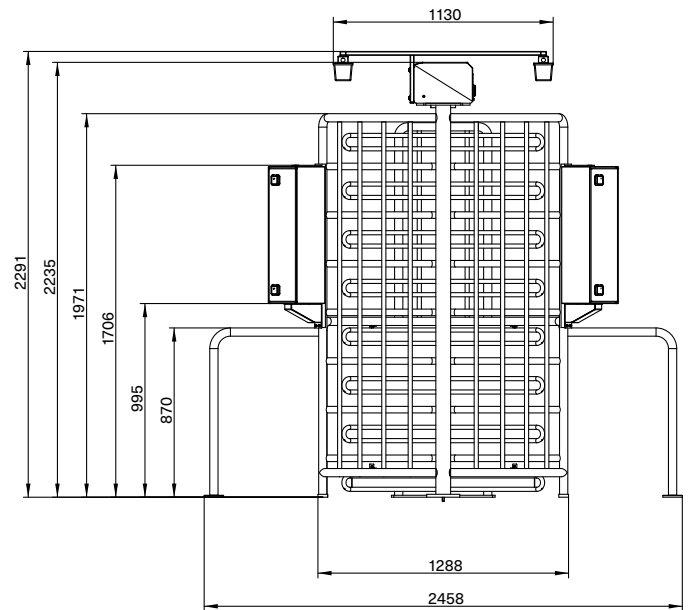


View from above

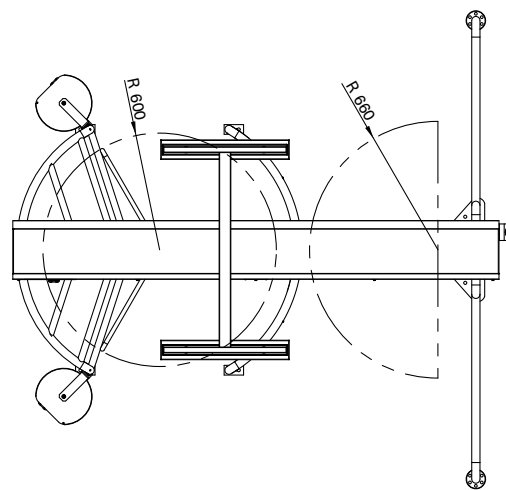

External view

Variant: turnstile on left

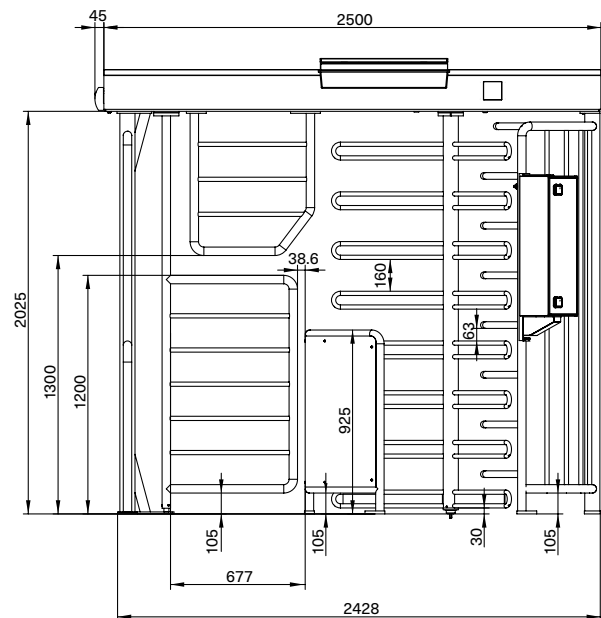


Access to Progress

Magnetic stands for pioneering products – in every way. Our access control systems for vehicles or pedestrians clear the way for thousands of people every day – at car parks, toll gates, stations, airports and in buildings. Our technology is also pioneering, however: with innovative drives, intelligent control systems and well thought-out details it provides maximum safety and longevity. Are you also on the path to Magnetic?



Vehicle barriers

Access barriers
Parking barriers
Toll barriers
Special barriers



Pedestrian gates

Turnstiles
Swing gates
Tripod gates
Retractable gates
Wing gates



Terminals

Cars
Trucks

Germany
MAGNETIC AUTOCONTROL GMBH
Grienmatt 20
79650 Schopfheim
Phone +49 7622 695-5
Fax +49 7622 695-800
E-mail info@magnetic-germany.com

Australia
MAGNETIC AUTOMATION PTY LTD
38 Metrolink Circuit
Campbellfield, VIC 3061
Phone +61 3 9339 2900
E-mail info@magnetic-oz.com

Austria
FAAC GMBH
Münchner Bundesstraße 123
5020 Salzburg
Phone +43 662 853395-0
E-Mail: at.info@faacgroup.com

Benelux countries
FAAC BENELUX NV/SA
Industriezone 3B
8490 Jabbeke
Belgium
Phone +32 50 320202
E-mail info@magnetic-benelux.com

Brazil
MAGNETIC AUTOCONTROL LTDA
Av. Salim Antônio Curiati, 136
04690-050 – São Paulo
Phone +55 11 5660 8500
E-mail info@magnetic-br.com

China
MAGNETIC CONTROL SYSTEMS CO., LTD
No. 3 Building, No. 51
Lane 1159, Kang Qiao (East) Road
Kang Qiao Industrial Zone, Shanghai
Phone +86 21 68182970
E-mail info@magnetic-cn.com

France
FAAC FRANCE
377 Rue Ferdinand Perrier
69808 St Priest Cedex
Phone +33 4 72 21 86 89
E-mail info@magnetic-fr.com

India
MAGNETIC AUTOCONTROL PVT LTD.
PRS Centre
Plot No. 373 to 376, 2nd Floor (West Wing)
1st Cross Street, Nehru Nagar
Old Mahabalipuram Road
Kottivakkam (Opp Rayala Technopark, Perungudi)
Chennai 600041
Phone +91 44 421 23297
E-mail info@magnetic-india.com

Middle East
FAAC MIDDLE EAST FZE
Dubai Silicon Oasis
PO Box 54886
Dubai
United Arab Emirates
Phone +971 4 3724193
E-mail info@magnetic-uae.com

N. and S. America (excl. Brazil)
FAAC INTERNATIONAL, INC
3160 Murrell Road
Rockledge, FL 32955
USA
Phone +1 321 635 8585
E-mail info@magnetic-usa.com

Scandinavia
FAAC NORDIC AB
Box 125
284 22 Perstorp
Sweden
Phone +46 435 77 95 03
E-mail info@magnetic-nordic.com

Southeast Asia
MAGNETIC CONTROL SYSTEMS SDN. BHD
No. 17, Jalan Anggerik Mokara 31/54
Taman Perindustrian Kota Kemuning
40460 Shah Alam
Selangor Darul Ehsan
Malaysia
Phone +60 3 5123 0033
E-mail info@magnetic-malaysia.com