


NEW BUILT-IN HYDRAULIC MOTORISATION

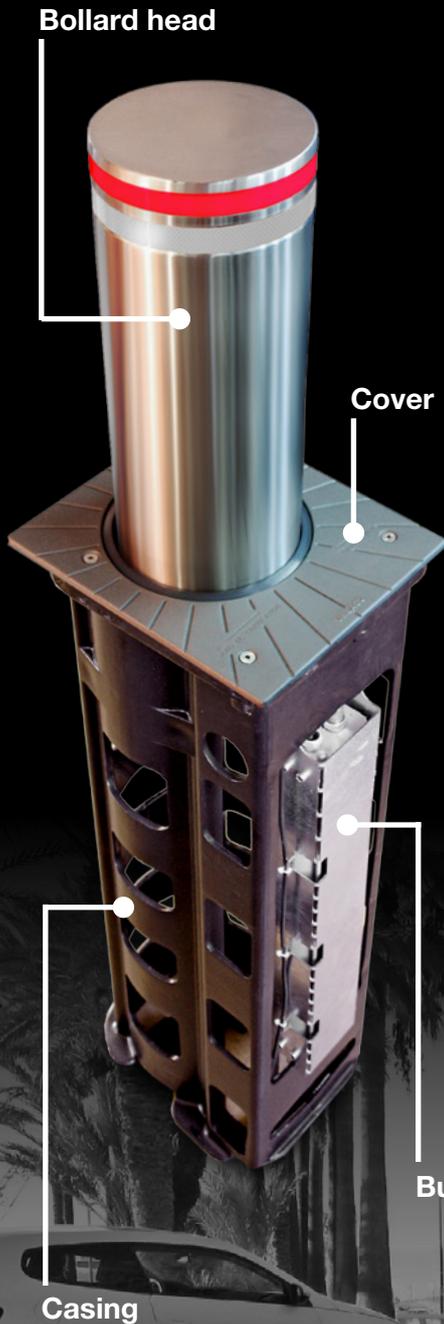

Compatible with G6 and G6 EVO ranges of bollards, the new built-in hydraulic motorisation is positioned directly inside the G6 casing thereby reducing the size of the control box (no pump inside) and making meaningless the hydraulic hose.

Only two electrical cables must be connected to the built-in waterproof housing, allowing a very easy on-site installation and maintenance.

Supply voltage : 230V - 50Hz Class 2
Working pressure: 30 bar
Power consumption: 600W
Standard working temperature range: -20 °C to +70 °C
(extended temperature range available in option)

Rise time: 5-7 seconds (depending on bollard size)
Lowering time: 5 seconds
(Complies with French Standard NF P98-310)

IP 68 protection class
Biodegradable hydraulic oil

Compatible bollards:
G6 250/750 - 200/750
G6 EVO 250/750 - 200/750



No hydraulic hose
Biodegradable hydraulic oil
Reduced maintenance costs
Easy installation and maintenance

* H.B. : Hydraulic Built-in
Intellectual property of URBACO - Copying forbidden - Specifications not contractually binding - Changes may be made without prior notice - Most of the models shown are patented - 05/2014
URBACO S.A. - a limited liability company with a capital of 1.5 M€ - Siret 33944567800032 R.C.S. AVIGNON 1999 B 40308 - VAT: FR 06 339 445 678w