

LIVING WALL

FOR IMPEDER/STOPPER BOLLARDS




1No. Living Wall sits over 2No. Bollard Units without compromising the HVM performance. To ensure compliance with BSI PAS 69 and IWA 14 - 2, the distance between each Bollard must be a maximum of 1.2m. This measurement is taken from the inside face of the bollard that sits within the external sleeve at a height of 600mm. Please note the rendered images shown are for visual purposes only. To discuss your requirements please contact our team.

+44(0)1902 499400
bristormtechnical@hill-smith.co.uk

Product	Living Wall
Material	Mild Steel
Finish	Galvanized/PPC/Plascoat
Design	Contact us for details
Branding	Please specify your requirements
Applied to	Impeder Bollards/ Stopper Bollards
Dimensions	Core Specific
2No. Bollard Unit	1No. Living Wall Unit
Installation	Bolted down/ Cast-in to 100mm finish



Standard RAL Colours Available
Traffic Black RAL 9017
Graphite Grey RAL 7024
Traffic Yellow RAL 1023
Traffic White RAL 9016
Traffic Green RAL 6024

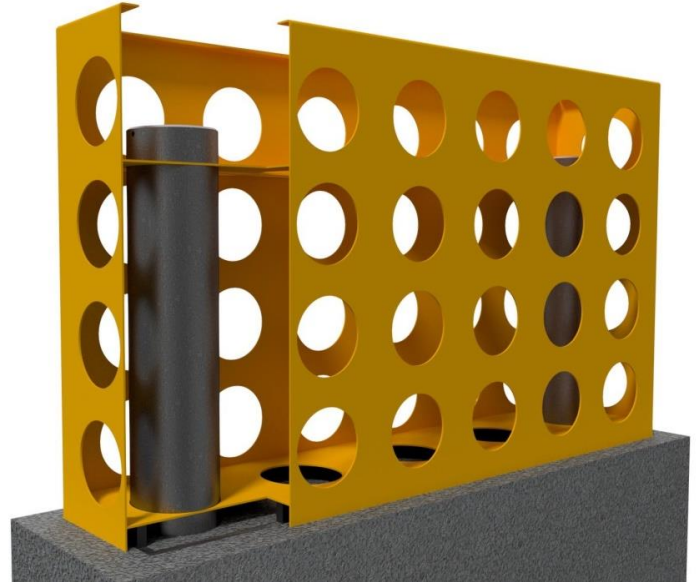

	Galvanised	Stainless Steel	Powder Coat (PCC)	Plascoat
Erosion protection	✓	✓	✓	✓
Smooth finish on corners and edges	✗	✓	✗	✓
Multiple colours available	✗	✗	✓	✓
Crack and peel resistance	✗	✗	✗	✓
Retouched without need to remove & re-coat	✗	✗	✓	✓
Additional aesthetics available	✓	✓	✓	✓

Hill & Smith Ltd Springvale Business & Industrial Park Bilston, Wolverhampton, WV14 0QL.		
Date 03/08/2018	Revision A	Sheet 1/1
DOC No.		TR - SF03
www.hill-smith.co.uk - www.bristorm.com		

This drawing is Copyright © of Hill & Smith Ltd and protected under UK and International law. All rights reserved. This drawing may not be copied in whole or in part or used for any other purpose other than for that which it is supplied without express written consent from the company.